

BIRCH, STEWART, KOLASCH & BIRCH, LLP

TERRELL C. BIRCH
RAYMOND C. STEWART
JOSEPH A. KOLASCH
JAMES M. SLATTERY
BERNARD L. SWEENEY*
MICHAEL K. MUTTER
CHARLES GORENSTEIN
GERALD M. MURPHY, JR.
LEONARD R. SVENSSON
TERRY L. CLARK
ANDREW D. MEIKLE
MARC S. WEINER
JOE MCINNEY WUNCY
ROBERT J. KENNEY
DONALD J. DALEY
JOHN W. BAILEY
JOHN A. CASTELLANO, III
GARY D. YACURA

OF COUNSEL
HERBERT M. BIRCH (1905-1996)
ELLIOT A. GOLDBERG*
WILLIAM L. GATES*
EDWARD H. VANCE
RUPERT J. BRADY (RET.)*
F. PRINCE BUTLER
FRED S. WHISENHUNT

*ADMITTED TO A BAR OTHER THAN VA

INTELLECTUAL PROPERTY LAW
8110 GATEHOUSE ROAD
SUITE 500 EAST
FALLS CHURCH, VA 22042-1210
USA

(703) 205-8000

FAX (703) 205-8050
(703) 698-8590 (G IV)

e-mail: mailroom@bskb.com
web: http://www.bskb.com

CALIFORNIA OFFICE
COSTA MESA, CALIFORNIA

THOMAS S. AUCHTERLONIE
JAMES T. ELLER, JR.
SCOTT L. LOWE
MARK J. NUEL, PH.D.
D. RICHARD ANDERSON
PAUL C. LEWIS
MARK W. MILSTEAD*
JOHN CAMPA*
RICHARD J. GALLAGHER

REG. PATENT AGENTS:
FREDERICK R. HANDREN
MARYANNE ARMSTRONG, PH.D.
SAKI HATSUMI
MIKE S. RYU
CRAIG A. MCROBBIE
GARTH M. DAHLEN, PH.D.
LAURA C. LUTZ
ROBERT E. GOZZNER, PH.D.
HYUNG N. SOHN
MATTHEW J. LATTIG
ALAN PEDERSEN-GILES
JUSTIN D. KARJALA
C. KEITH MONTGOMERY
TIMOTHY R. WYCKOFF
HERMES M. SOYEZ, PH.D.
KRISTI L. RUPERT, PH.D.

J0685 U.S. PTO
08/18/00

Date: August 18, 2000
Docket No.: 1163-0286P

Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): TSUKAHARA, Daisuke
AKITA, Yasutaka; OKA, Susumu
MURAKAMI, Tokumichi; MATSUDA, Yukinari

For: CONDITIONAL ACCESS SYSTEM ENABLING PARTIAL VIEWING

Enclosed are:

- ☒ A specification consisting of 44 pages
- ☒ 12 sheet(s) of Formal drawings
- ☒ An assignment of the invention
- ☒ Certified copy of Priority Document(s)
- ☒ Executed Declaration ☒ Original ☐ Photocopy
- ☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27
- ☐ Preliminary Amendment
- ☒ Information Disclosure Statement, PTO-1449 and reference(s)

J0687 U.S. PTO
09/04/02
08/18/00

Other _____

The filing fee has been calculated as shown below:

| LARGE ENTITY | | | | SMALL ENTITY | |
|--|-----------|-----------|-----------------|--------------|----------------|
| FOR | NO. FILED | NO. EXTRA | RATE FEE | | RATE FEE |
| BASIC FEE | ***** | ***** | ***** | | **** |
| | ***** | ***** | ***** \$690.00 | or | **** \$345.00 |
| | ***** | ***** | ***** | | **** |
| TOTAL CLAIMS | 20 - 20 = | 0 | x18 =\$ 0.00 | or | x 9 = \$ 0.00 |
| INDEPENDENT | 1 - 3 = | 0 | x78 =\$ 0.00 | or | x 39 = \$ 0.00 |
| MULTIPLE DEPENDENT CLAIM PRESENTED <u>no</u> | | | +260 = \$ 0.00 | or | +130 = \$ 0.00 |
| | | | TOTAL \$ 690.00 | | TOTAL \$ 0.00 |

X A check in the amount of \$ 730.00 to cover the filing fee and recording fee (if applicable) is enclosed.

— Please charge Deposit Account No. 02-2448 in the amount of \$ _____. A triplicate copy of this transmittal form is enclosed.

— No fee is enclosed.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. 1.16 or under 37 C.F.R. 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By _____

JOHN CASTELLANO
Reg. No. 35,094
P. O. Box 747

Falls Church, Virginia 22040-0747

TITLE OF THE INVENTION

CONDITIONAL ACCESS SYSTEM ENABLING PARTIAL VIEWING

5 BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a conditional access system allowing only specific receivers to receive video and audio digital signals which are broadcast or delivered via media
10 such as satellite waves, terrestrial waves or cables.

Description of Related Art

Fig. 12 is a block diagram showing a conventional conditional access system described in Telecommunications
15 Technology Counsel Report, Advisory No. 74. In this figure, the reference numeral 1 designates a system controller for generating and managing various keys and subscriber contract information; 2 designates a scrambling processor for encrypting coded media data output from sources like encoders on a
20 transmitting side using scrambling keys output from the system controller 1; 3 designates an ECM (Entitlement Control Message) generator for generating an ECM from the scrambling keys used for encrypting the coded media data and from program associated information including a broadcasting type of a program and charge
25 information; and 4 designates an ECM encryption section for encrypting the ECM using work keys output from the system controller 1.

The reference numeral 5 designates an EMM (Entitlement Management Message) generator for generating an EMM from the work
30 keys used for encrypting the ECM and from subscriber contract

information for each receiver; 6 designates an EMM encryption section for encrypting the EMM using a master key output from the system controller 1; 7 designates a multiplexer for generating a packet stream by multiplexing encrypted coded media data, ECM and EMM, and for supplying the packet stream to a transmission path 8 for transmitting the packet stream.

The reference numeral 9 designates a demultiplexer for demultiplexing the packet stream transmitted from the transmitting site into the encrypted coded media data, ECM and EMM; 10 designates a master key managing section for storing in advance a master key used for decrypting the EMM; and 11 designates an EMM analyzer for retrieving from the EMM the subscriber contract information and work keys using the master key stored in the master key managing section 10. The EMM analyzer 11 outputs the work keys only when the subscriber contract information authorizes viewing.

The reference numeral 12 designates an ECM analyzer for decrypting the ECM using the work keys supplied from the EMM analyzer 11, and for retrieving the scrambling keys from the ECM; 13 designates a descrambling processor for descrambling the coded media data using the scrambling keys supplied from the ECM analyzer 12; 14 designates a media decoding section for decoding the coded media data descrambled by the descrambling processor 13; and 15 designates a television receiver for displaying pictures and outputting voices in response to the coded media data decoded by the media decoding section 14.

Next, the operation of the conventional conditional access system will be described.

First, on the transmitting side, the scrambling processor 2 in the transmitting site encrypts the coded media data output

from encoders or the like when the coded media data is specific coded media data to be scrambled, such as pay programs.

The ECM generator 3 places into the ECM the scrambling keys used for the encryption, the program associated information
5 indicating the broadcasting type of the program, etc., and the ECM encryption section 4 encrypts the ECM. However, it usually does not encrypt the program associated information in the ECM.

The EMM generator 5 places into the EMM the work keys used in the encryption, the subscriber contract information for each
10 receiver, etc., and the EMM encryption section 6 encrypts the EMM using the master key prepared for the individual receivers. However, it usually does not encrypt the subscriber contract information in the EMM.

Then, the multiplexer 7 multiplexes the encrypted coded
15 media data, encrypted ECM and encrypted EMM, and supplies the multiplexed data to the transmission path 8, through which the various pieces of the information are transmitted as a packet stream.

The packet stream sent from the transmitting side passes
20 through the transmission path 8, and is received by the demultiplexer 9 on the receiving side. On the receiving side, the demultiplexer 9 in the receiving site extracts the encrypted EMM from the packet stream, first. Then, the EMM analyzer 11 decrypts the EMM using the master key stored in the master key
- 25 managing section 10 for individual receivers, and retrieves from the EMM the subscriber contract information and work keys (since the subscriber contract information is not usually encrypted, it can be referred to without the decryption).

The EMM analyzer 11 supplies the work keys to the ECM
30 analyzer 12 only when the subscriber contract information

authorizes the viewing.

Receiving the work keys from the EMM analyzer 11, the ECM analyzer 12 decrypts the encrypted ECM using the work keys, retrieves the scrambling keys from the ECM, and supplies the
5 scrambling keys to the descrambling processor 13.

Receiving the scrambling keys from the ECM analyzer 12, the descrambling processor 13 descrambles the coded media data using the scrambling keys, and the media decoding section 14 decodes the coded media data descrambled by the descrambling processor
10 13.

The decoded coded media data is transferred to the television receiver 15 that displays pictures and outputs voices.

With the foregoing configuration, the conventional
15 conditional access system authorizes only specific users' receivers to descramble the coded media data in accordance with the contents of the subscriber contract information. The receivers of unauthorized users, however, cannot retrieve the scrambling keys, and hence the unauthorized users cannot view
20 programs at all. Thus, they cannot view even fragments of pictures of programs, and hence cannot have slightest feelings about the programs as in analog broadcasts. As a result, they cannot decide as to whether they make a new contract or not after trial viewing of some programs, which prevents the providers from
- 25 making effective invitation to their programs.

SUMMARY OF THE INVENTION

The present invention is implemented to solve the foregoing problem. It is therefore an object of the present invention to
30 provide a conditional access system capable of allowing

unauthorized users to watch pictures to some extent in order to increase their desire for programs, thereby making effective invitation to the programs.

According to one aspect of the present invention, there is
 5 provided a conditional access system comprising: a demultiplexer for demultiplexing a packet stream transmitted from a transmitting site into encrypted coded media data, an ECM (Entitlement Control Message) and an EMM (Entitlement Management Message); an EMM decryption section for retrieving work keys and
 10 subscriber contract information from the EMM extracted by the demultiplexer; means for retrieving partial viewing authorization information included in one of the EMM and ECM extracted by the multiplexer; an ECM decryption section for decrypting the ECM using the work keys, and for retrieving
 15 scrambling keys from the ECM; and outputting means for descrambling and decoding part of the coded media data using the scrambling keys when the partial viewing authorization information permits partial viewing, and for outputting the partially decoded coded media data.

20 Here, the ECM decryption section may comprise: means for intermittently retrieving the scrambling keys from the ECM when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing, and wherein the outputting means comprises: a media data
 - 25 descrambling section for descrambling the coded media data using the scrambling keys retrieved by the ECM decryption section; and a decoding section for decoding the coded media data descrambled by the media data descrambling section.

The means for intermittently retrieving the scrambling keys
 30 may comprise: a decryption validity decision section for

outputting decryption control information in response to the subscriber contract information and the partial viewing authorization information; and a decryption processor for intermittently retrieving the scrambling keys from the ECM in response to the decryption control information when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing.

The means for intermittently retrieving the scrambling keys may comprises: a decryption processor for retrieving all scrambling keys included in the ECM; a scrambling key output validity decision section for outputting output control information in response to the subscriber contract information and the partial viewing authorization information; and an output controller for supplying the media data descrambling section with only part of the scrambling keys in response to the output control information when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing.

The outputting means may comprise: a media data descrambling section for intermittently descrambling the coded media data using the scrambling keys when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing; and a decoding section for decoding the coded media data descrambled by the media data descrambling section.

The media data descrambling section may comprise: a descramble validity decision section for outputting descramble control information alternately authorizing and inhibiting descrambling when the subscriber contract information inhibits viewing and the partial viewing authorization information

permits partial viewing; a descrambler for descrambling part of the coded media data in response to the descramble control information; and a scramble control information modifier for handling part of the coded media data which is not descrambled as unencrypted data.

The outputting means may comprise: a media data descrambling section for descrambling the coded media data using the scrambling keys retrieved by the ECM decryption section; and a decoding section for intermittently decoding the coded media data descrambled by the media data descrambling section, when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing.

The decoding section may comprise: a decoding validity decision section for outputting decoding control information in response the subscriber contract information and the partial viewing authorization information; and a decoding processor for decoding only part of frames in a frame sequence constituting the coded media data in response to the decoding control information when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing.

The decoding processor may decode only I frames in response to the decoding control information when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing.

The decoding section may comprise: a decoding processor for decoding all the coded media data descrambled by the media data descrambling section; and a media display controller for supplying only part of the descrambled coded media data to a

television receiver when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing.

The outputting means may comprise: a media data
 5 descrambling section for descrambling the coded media data using the scrambling keys retrieved by the ECM decryption section; and a decoding section for decoding the coded media data descrambled by the media data descrambling section, for storing the decoded coded media data into a memory on a block by block basis, and
 10 for outputting the blocks with changing their sequence when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing.

The EMM decryption section may comprise means for intermittently retrieving work keys from the EMM when the
 15 subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing, the ECM decryption section may decrypt the ECM using the work keys and retrieves scrambling keys from the ECM, and the outputting means may comprise: a media data descrambling section for
 20 descrambling the coded media data using the scrambling keys retrieved by the ECM decryption section; and a decoding section for decoding the coded media data descrambled by the media data descrambling section.

The means for intermittently retrieving work keys may
 -- 25 comprise: a decryption validity decision section for outputting decryption control information in response to the subscriber contract information and the partial viewing authorization information; and a decryption processor for retrieving only part of the work keys from the EMM in response to the decryption control
 30 information when the subscriber contract information inhibits

viewing and the partial viewing authorization information permits partial viewing.

The means for intermittently retrieving work keys may comprise: a decryption processor for retrieving all the work keys
5 included in the EMM; a work key output validity decision section for outputting output control information about the work keys in response to the subscriber contract information and the partial viewing authorization information; and a work key output controller for supplying only part of the work keys to the ECM
10 decryption section in response to the output control information when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing.

The partial viewing authorization information may include
15 a control parameter indicating a partially authorized viewable range.

The partial viewing authorization information may consist of information authorizing viewing only for a specific time period.

20 The subscriber contract information that includes information authorizing partial viewing may be used as the partial viewing authorization information.

The EMM may be used into which the work keys are inserted only for specific time periods.

— 25 The demultiplexer and the decoding section may be based on the MPEG-2 standard.

The conditional access system may determine, when a plurality of programs are multiplexed into the packet stream transmitted from the transmitting site, authorization, partial
30 authorization and inhibition of viewing the programs for

individual programs independently.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing a configuration of an
5 embodiment 1 of a conditional access system in accordance with
the present invention;

Fig. 2 is a block diagram showing an internal configuration
of the ECM analyzer 32 of the embodiment 1;

Fig. 3 is a block diagram showing an internal configuration
10 of the ECM analyzer 32 of an embodiment 2 of the conditional access
system in accordance with the present invention;

Fig. 4 is a block diagram showing an internal configuration
of a descrambling processor 33 of an embodiment 3 of the
conditional access system in accordance with the present
15 invention;

Fig. 5 is a block diagram showing an internal configuration
of the media decoding section 34 of an embodiment 4 of the
conditional access system in accordance with the present
invention;

Fig. 6 is a block diagram showing an internal configuration
20 of the media decoding section 34 of an embodiment 6 of the
conditional access system in accordance with the present
invention;

Fig. 7 is a block diagram showing an internal configuration
25 of the media decoding section 34 of an embodiment 7 of the
conditional access system in accordance with the present
invention;

Fig. 8 is a block diagram showing an internal configuration
of the EMM analyzer 31 of an embodiment 8 of the conditional access
30 system in accordance with the present invention;

Fig. 9 is a block diagram showing an internal configuration of the EMM analyzer 31 of an embodiment 9 of the conditional access system in accordance with the present invention;

Fig. 10 is a block diagram showing a configuration of an embodiment 10 of the conditional access system in accordance with the present invention;

Fig. 11 is a block diagram showing a configuration of an embodiment 12 of the conditional access system in accordance with the present invention; and

Fig. 12 is a block diagram showing a configuration of a conventional conditional access system.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The invention will now be described with reference to the accompanying drawings.

EMBODIMENT 1

Fig. 1 is a block diagram showing a configuration of an embodiment 1 of a conditional access system in accordance with the present invention. In this figure, the reference numeral 21 designates a system controller for generating and managing various keys and subscriber contract information; 22 designates a scrambling processor for encrypting coded media data (program signals) output from sources such as encoders on a transmitting side using scrambling keys output from the system controller 21; 23 designates an ECM generator for generating an ECM from the scrambling keys used for encrypting the coded media data and from program associated information including a broadcasting type of a program, charge information etc.; and 24 designates an ECM encryption section for encrypting the ECM using work keys output from the system controller 21.

The reference numeral 25 designates an EMM generator for generating EMM from the work keys used for encrypting the ECM, from the subscriber contract information of individual receivers and from partial viewing authorization information; 26

5 designates an EMM encryption section for encrypting the EMM with the master key output from the system controller 21; 27 designates a multiplexer for multiplexing the encrypted coded media data, ECM and EMM into a packet stream, and for supplying the packet stream to the transmission path 28 to be transmitted.

10 The reference numeral 29 designates a demultiplexer for demultiplexing the packet stream sent from the transmitting site into the encrypted coded media data, ECM and EMM; 30 designates a master key managing section for prestoring a master key for decrypting the EMM; 31 designates an EMM analyzer for retrieving
15 from the EMM the subscriber contract information, partial viewing authorization information and work keys using the master key stored in the master key managing section 30. The EMM analyzer 31 outputs the work keys when the subscriber contract information authorizes viewing or the partial viewing
20 authorization information permits partial viewing. The master key managing section 30 and EMM analyzer 31 constitute an EMM decryption section.

The reference numeral 32 designates an ECM analyzer (ECM decryption section) for decrypting the ECM using the work keys
-- 25 supplied from the EMM analyzer 31, and for retrieving the scrambling keys from the ECM when the subscriber contract information authorizes viewing or the partial viewing authorization information permits partial viewing. In particular, the ECM analyzer 32 intermittently retrieves the
30 scrambling keys from the ECM when the subscriber contract

information inhibits viewing and the partial viewing authorization information permits partial viewing.

The reference numeral 33 designates a descrambling processor (media data descrambling section) for descrambling the coded media data using the scrambling keys it receives from the ECM analyzer 32; 34 designates a media decoding section (decoding section) for decoding the coded media data descrambled by the descrambling processor 33; and 35 designates a television receiver for displaying pictures and outputting voices in response to the coded media data decoded by the media decoding section 34.

Fig. 2 is a block diagram showing an internal configuration of the ECM analyzer 32. In this figure, the reference numeral 32a designates a decryption validity decision section for generating, in response to the subscriber contract information and the partial viewing authorization information, decryption control information for controlling a decryption processing of the ECM; 32b designates a decryption processor for decrypting the ECM in response to the decryption control information generated by the decryption validity decision section 32a.

Next, the operation of the present embodiment 1 will be described.

On the transmitter side, the scrambling processor 22 in the transmitting site encrypts (scrambles) the coded media data output from encoders or the like when the coded media data is specific coded media data to be scrambled such as pay programs.

The ECM generator 23 places into the ECM the scrambling key used for the encryption and the program associated information indicating the program broadcasting type and the like, and the ECM encryption section 24 encrypts the ECM. However, it does

not usually encrypt the program associated information in the ECM.

At the same time, the EMM generator 25 places into the EMM the work keys used for the encryption, the subscriber contract
 5 information for each receiver and the partial viewing authorization information, and the EMM encryption section 26 encrypts the EMM. However, it does not usually encrypt the subscriber contract information and the partial viewing authorization information in the EMM. The encryption is carried
 10 out using the master keys assigned to each receiver.

Then the multiplexer 27 multiplexes the encrypted coded media data, encrypted ECM and encrypted EMM into one stream, and supplies it to the transmission path 28 to be transmitted as a packet stream.

15 The packet stream transmitted from the transmitting side passes through the transmission path 28, and is received by the demultiplexer 29 on the receiving side. On the receiving side, the demultiplexer 29 in the receiving site extracts the encrypted EMM from the packet stream, first. Then, the EMM analyzer 31
 20 decrypts the EMM using the master key stored in the master key managing section 30 of each receiver, and retrieves from the EMM the subscriber contract information, the partial viewing authorization information and the work keys (the subscriber contract information and the partial viewing authorization
 - 25 information can be referred to without passing through the decryption processing because they are not usually decrypted).

The EMM analyzer 31 supplies the work keys to the ECM analyzer 32 when the subscriber contract information authorizes viewing or the partial viewing authorization information permits
 30 partial viewing. In contrast, it does not supply the work keys

to the ECM analyzer 32 when the subscriber contract information inhibits the viewing and the partial viewing authorization information inhibits the partial viewing.

Receiving the work keys from the EMM analyzer 31, the ECM
5 analyzer 32 decrypts the encrypted ECM using the work keys, and retrieves the scrambling keys from the ECM.

Specifically, when the subscriber contract information authorizes viewing, the decryption validity decision section 32a in the ECM analyzer 32 supplies the decryption processor 32b with
10 the decryption control information which authorizes decryption regardless of the contents of the partial viewing authorization information.

In this case, the decryption processor 32b continuously retrieves the scrambling keys from the ECM.

15 On the other hand, when the subscriber contract information inhibits viewing, and the partial viewing authorization information permits partial viewing, the decryption validity decision section 32a supplies the decryption processor 32b alternately with the decryption control information authorizing
20 the decryption and the decryption control information inhibiting the decryption.

In this case, the decryption processor 32b intermittently retrieves the scrambling keys from the ECM.

When both the subscriber contract information and partial
- 25 viewing authorization information inhibit viewing and partial viewing, the decryption validity decision section 32a in the ECM analyzer 32 supplies the decryption processor 32b with the decryption control information that inhibits the decryption.

In this case, the decryption processor 32b does not retrieve
30 the scrambling keys from the ECM.

Receiving the scrambling keys from the ECM analyzer 32, the descrambling processor 33 decrypts (descrambles) the coded media data using the scrambling keys, and the media decoding section 34 decodes the coded media data descrambled by the descrambling processor 33.

The television receiver 35 displays pictures and outputs voices in response to the decoded coded media data supplied thereto.

Although the television receiver 35 can display the pictures properly because of the correctly decrypted coded media data when the descrambling processor 33 receives the scrambling keys continuously, it can only display improper pictures when the descrambling processor 33 receives the scrambling keys intermittently. This is because the television receiver 35 receives only the incorrectly decrypted coded media data (because only part of the coded media data is decrypted with the scrambling keys different from the authorized scrambling keys).

Thus, by adjusting the frequency of correct decryption of the coded media data, that is, the frequency of the retrievals of the scrambling keys from the ECM by the ECM analyzer 32, the television receiver 35 can display partially correct pictures so that a user can have only a feeling about the program as a whole.

As described above, the present embodiment 1 is configured such that it decrypts the ECM using the work keys when the partial viewing authorization information retrieved by the ECM analyzer 31 permits partial viewing, and intermittently retrieves the scrambling keys from the ECM. This offers an advantage of being able to authorize an unauthorized user to partially display pictures, and hence effectively increase desire of the user to

subscribe to the provider.

EMBODIMENT 2

Fig. 3 is a block diagram showing an internal configuration
5 of the ECM analyzer 32 of an embodiment 2 of the conditional access
system in accordance with the present invention, in which the
same reference numerals designate the same or like portions to
those of Fig. 2, and the description thereof is omitted here.

In Fig. 3, the reference numeral 32c designates a decryption
10 processor for retrieving the scrambling keys from the ECM using
the work keys retrieved from the EMM analyzer 31; 32d designates
a scrambling key output validity decision section for generating
output control information for controlling the output of the
scrambling keys in response to the subscriber contract
15 information and partial viewing authorization information; and
32e designates a scrambling key output controller for
controlling the output of the scrambling keys in response to the
output control information generated by the scrambling key
output validity decision section 32d.

20 Next, the operation of the present embodiment 2 will be
described.

Although the foregoing embodiment 1 controls the ECM
decryption processing in response to the subscriber contract
information and partial viewing authorization information, this
- 25 is not essential. For example, the output of the scrambling keys
rather than the decryption thereof can be controlled using the
subscriber contract information and partial viewing
authorization information, achieving the same advantage as the
foregoing embodiment 1.

30 More specifically, receiving the work keys from the EMM

analyzer 31, the decryption processor 32c retrieves the scrambling keys from the ECM using the work keys regardless of the contents of the subscriber contract information and partial viewing authorization information, that is, retrieves all the
5 scrambling keys from the ECM.

When the subscriber contract information authorizes viewing, the scrambling key output validity decision section 32d supplies the scrambling key output controller 32e with the output control information permitting the output of all the scrambling
10 keys regardless of the contents of the partial viewing authorization information.

In this case, the scrambling key output controller 32e supplies the descrambling processor 33 with all the scrambling keys output from the decryption processor 32c.

15 When the subscriber contract information inhibits the viewing and the partial viewing authorization information permits partial viewing, the scrambling key output validity decision section 32d supplies the scrambling key output controller 32e with the output control information alternately
20 enabling and disabling the output of the scrambling keys.

In this case, the scrambling key output controller 32e supplies the descrambling processor 33 with only selected ones among the scrambling keys output from the decryption processor 32c.

— 25 When neither the subscriber contract information nor the partial viewing authorization information authorizes the viewing or partial viewing, the scrambling key output validity decision section 32d supplies the scrambling key output controller 32e with the output control information disabling the
30 output of the scrambling keys.

In this case, the scrambling key output controller 32e supplies the descrambling processor 33 with none of the scrambling keys output from the decryption processor 32c.

5 EMBODIMENT 3

Fig. 4 is a block diagram showing an internal configuration of the descrambling processor 33 of an embodiment 3 of the conditional access system in accordance with the present invention, in which the same or like portions to those of Fig. 3 are designated by the same reference numerals and the description thereof is omitted here.

In Fig. 4, the reference numeral 33a designates a descramble validity decision section for generating descramble control information for controlling the decryption processing of the coded media data in response to the subscriber contract information and partial viewing authorization information; 33b designates a descrambler for descrambling the coded media data using the scrambling keys retrieved from the ECM analyzer 32 only when the descramble validity decision section 33a outputs the descramble control information enabling the decryption of the coded media data; and 33c designates a scramble control information modifier for rewriting the scramble control information associated with the coded media data which is not decrypted by the descrambler 33b when the descramble validity decision section 33a outputs the descramble control information disabling the decryption of the coded media data, so that such coded media data will be handled as unencrypted data.

Next, the operation of the present embodiment 3 will be described.

30 Although in the foregoing embodiment 2 the ECM analyzer 32

controls the output of the scrambling keys in response to the subscriber contract information and partial viewing authorization information, this is not essential. For example, the descrambling processor 33 can control its decryption
 5 processing of the coded media data in response to the subscriber contract information and partial viewing authorization information, offering the same advantage as the foregoing embodiment 2.

More specifically, receiving the subscriber contract
 10 information and partial viewing authorization information from the EMM analyzer 31, the descramble validity decision section 33a supplies, when the subscriber contract information authorizes viewing, the descrambler 33b and scramble control information modifier 33c with the descramble control information
 15 enabling the decryption of the coded media data regardless of the contents of the partial viewing authorization information.

In this case, the descrambler 33b decrypts the coded media data using the scrambling keys retrieved by the ECM analyzer 32, and the scramble control information modifier 33c supplies the
 20 media decoding section 34 with the coded media data decrypted by the descrambler 33b without changing it.

On the other hand, when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing, the descramble validity
 - 25 decision section 33a supplies both the descrambler 33b and scramble control information modifier 33c with the descramble control information alternately enabling and disabling the decryption.

In this case, the descrambler 33b decrypts part of the coded
 30 media data using the scrambling keys retrieved by the ECM

analyzer 32: When the descrambler 33b decrypts the coded media data, the scramble control information modifier 33c supplies the decrypted coded media data to the media decoding section 34 without change; in contrast with this, when the descrambler 33b does not decrypt the coded media data, the scramble control information modifier 33c supplies the media decoding section 34 with the coded media data after rewriting the scramble control information associated with the coded media data so that the coded media data is handled as undecrypted data.

10 When both the subscriber contract information and partial viewing authorization information inhibit viewing, the descramble validity decision section 33a supplies both the descrambler 33b and scramble control information modifier 33c with the descramble control information disabling the decryption
15 of the coded media data.

In this case, the descrambler 33b outputs the encrypted coded media data without decrypting it. The scramble control information modifier 33c supplies the undecrypted coded media data to the media decoding section 34 after rewriting the
20 scramble control information associated with the undecrypted coded media data so that the undecrypted coded media data will be handled as encrypted data.

Thus, the media decoding section 34 cannot properly decode the coded media data not decrypted by the descrambler 33b. As
- 25 a result, the television receiver 35 displays only partially correct pictures as in the foregoing embodiment 2.

EMBODIMENT 4

Fig. 5 is a block diagram showing an internal configuration
30 of the media decoding section 34 in an embodiment 4 of the

conditional access system in accordance with the present invention, in which the same reference numerals designate the same or like portions to those of Fig. 4, and the description thereof is omitted here.

5 In Fig. 5, the reference numeral 34a designates a decoding validity decision section for generating decoding control information for controlling the decoding processing of the coded media data in response to the subscriber contract information and partial viewing authorization information; and 34b
10 designates a decoding processor for decoding the coded media data decrypted by the descrambling processor 33 only when the decoding validity decision section 34a outputs the decoding control information enabling the decoding of the coded media data.

Next, the operation of the present embodiment 4 will be
15 described.

Although the descrambling processor 33 restricts the decryption processing of the coded media data in response to the subscriber contract information and partial viewing authorization information in the foregoing embodiment 3, this
20 is not essential. For example, the media decoding section 34 rather than the descrambling processor 33 can restrict the decoding processing of the coded media data in response to the subscriber contract information and partial viewing authorization information, offering an advantage similar to that
— 25 of the foregoing embodiment 3.

More specifically, receiving the subscriber contract information and partial viewing authorization information from the EMM analyzer 31, the decoding validity decision section 34a supplies, when the subscriber contract information authorizes
30 decoding, the decoding processor 34b with the decoding control

information enabling the decoding of the coded media data regardless of the content of the partial viewing authorization information.

In this case, the decoding processor 34b decodes the coded
5 media data decrypted by the descrambling processor 33, and supplies it to the television receiver 35.

When the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing, the decoding validity decision section 34a
10 supplies the decoding processor 34b with the decoding control information alternately enabling and disabling the decoding of the coded media data.

In this case, the decoding processor 34b decodes only fragments of the coded media data decrypted by the descrambling
15 processor 33, and supplies them to the television receiver 35.

On the other hand, when both the subscriber contract information and partial viewing authorization information inhibit viewing, the decoding validity decision section 34a supplies the decoding processor 34b with the decoding control
20 information disabling the decoding of the coded media data.

In this case, the decoding processor 34b supplies the television receiver 35 with the coded media data which is decrypted by the descrambling processor 33 without decoding it.

Since the television receiver 35 cannot properly display
- 25 the coded media data not decoded by the decoding processor 34b, the television receiver 35 displays corrupted pictures as in the foregoing embodiment 3.

EMBODIMENT 5

30 Although the decoding processing of the coded media data

is restricted in the foregoing embodiment 4, it is also possible to selectively decode part of frames included in the coded media data such as I frames (intra-frame predictive coded frames) selected from a successive coded media data frame sequence.

- 5 This enables television receiver 35 to display pictures in a frame skipping state.

EMBODIMENT 6

- 10 Fig. 6 is a block diagram showing an internal configuration of the media decoding section 34 in an embodiment 6 of the conditional access system in accordance with the present invention, in which the same reference numerals designate corresponding portions to those of Fig. 5, and hence the description thereof is omitted here.

- 15 In Fig. 6, the reference numeral 34c designates a decoding processor for decoding the coded media data decrypted by the descrambling processor 33; and 34d designates a media display controller for controlling the output of the coded media data in response to the subscriber contract information and partial
20 viewing authorization information.

Next, the operation of the present embodiment 6 will be described.

- Although the media decoding section 34 restricts the decoding processing of the coded media data in response to the
- 25 subscriber contract information and partial viewing authorization information in the foregoing embodiment 4, this is not essential. For example, the coded media data decrypted by the descrambling processor 33 may be decoded in its entirety, and then its output may be restricted in response to the
30 subscriber contract information and partial viewing

authorization information, achieving an advantage similar to that of the foregoing embodiment 4.

More specifically, receiving the coded media data from the descrambling processor 33, the decoding processor 34c decodes
5 the coded media data and supplies the decoded coded media data to the media display controller 34d regardless of the contents of the subscriber contract information and partial viewing authorization information.

The media display controller 34d receives the decoded coded
10 media data from the decoding processor 34c, and supplies, when the subscriber contract information authorizes viewing, the decoded coded media data to the television receiver 35 regardless of the content of the partial viewing authorization information.

On the other hand, when the subscriber contract information
15 inhibits viewing and the partial viewing authorization information permits partial viewing, the media display controller 34d supplies the television receiver 35 with only part of the decoded coded media data supplied from the decoding processor 34c, such as specific pictures (I pictures, for
20 example).

When both the subscriber contract information and partial viewing authorization information inhibit viewing, the media display controller 34d does not supply the television receiver
35 with the decoded coded media data output from the decoding
- 25 processor 34c.

Thus, when part of the decoded coded media data is transferred to the television receiver 35, it displays only part of the pictures in a frame skipping mode.

Fig. 7 is a block diagram showing an internal configuration of the media decoding section 34 in an embodiment 7 of the conditional access system in accordance with the present invention, in which the same reference numerals designate the same or like portions to those of Fig. 6, and the description thereof is omitted here.

In Fig. 7, the reference numeral 34e designates a decoding processor for decoding the coded media data decrypted by the descrambling processor 33, for storing decoded coded media data into a frame memory 34f, and for supplying the decoded coded media data stored in the frame memory 34f to the television receiver 35; and 34f designates the frame memory for temporarily storing the decoded coded media data.

Next, the operation of the present embodiment 7 will be described.

Although the media decoding section 34 controls the output of the decoded coded media data in response to the subscriber contract information and partial viewing authorization information in the foregoing embodiment 6, this is not essential. For example, the media decoding section 34 can once store the decoded coded media data into the frame memory 34f on a block by block basis, and then output the decoded coded media data with changing an order of the blocks, achieving an advantage similar to that of the foregoing embodiment 6.

More specifically, receiving the coded media data from the descrambling processor 33, the decoding processor 34e decodes the coded media data regardless of the content of the subscriber contract information and partial viewing authorization information, and stores the decoded coded media data into the frame memory 34f. In this case, the decoding processor 34e

stores the decoded coded media data into the frame memory 34f on a block by block basis.

Subsequently, when the subscriber contract information authorizes viewing, the decoding processor 34e supplies the television receiver 35 with the decoded coded media data stored in the frame memory 34f regardless of the content of the partial viewing authorization information without changing the sequence of the blocks.

On the other hand, when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing, the decoding processor 34e supplies the television receiver 35 with the decoded coded media data stored in the frame memory 34f with changing the order of the blocks.

When both the subscriber contract information and partial viewing authorization information inhibit viewing, the decoding processor 34e does not supply the television receiver 35 with the decoded coded media data stored in the frame memory 34f.

Thus, when the decoded coded media data stored in the frame memory 34f is supplied to the television receiver 35 with changing the sequence of the blocks, it can display pictures at random on a block by block basis, although individual pictures in each block will be correctly displayed. Thus, by controlling the timing of changing the order of the blocks, the picture display is achieved such that a user can have a feeling of the program as a whole.

EMBODIMENT 8

Fig. 8 is a block diagram showing an internal configuration of the EMM analyzer 31 in an embodiment 8 of the conditional access

system in accordance with the present invention, in which the same reference numerals designate the same or like portions to those of Fig. 2, and the description thereof is omitted here.

In Fig. 8, the reference numeral 31a designates a decryption validity decision section for retrieving the subscriber contract information and partial viewing authorization information from the EMM output from the demultiplexer 29, and for generating decryption control information for controlling the decryption processing of the work keys in response to the subscriber contract information and partial viewing authorization information; and 31b designates a decryption processor for decrypting the EMM using the master key only when the decryption control information enables the decryption of the work keys, and for retrieving the work keys from the EMM.

Next, the operation of the present embodiment 8 will be described.

Although the ECM analyzer 32 controls the decryption processing of the ECM in response to the subscriber contract information and partial viewing authorization information in the foregoing embodiment 1, this is not essential. Instead of this, for example, the EMM analyzer 31 can control the decryption processing of the EMM in response to the subscriber contract information and partial viewing authorization information, achieving an advantage similar to that of the foregoing embodiment 1.

More specifically, the decryption validity decision section 31a retrieves the subscriber contract information and partial viewing authorization information from the EMM output from the demultiplexer 29. Since the subscriber contract information and partial viewing authorization information are

not usually encrypted, they can be referred to without passing through the decryption processing.

When the subscriber contract information authorizes viewing, the decryption validity decision section 31a supplies
 5 the decryption processor 31b with the decryption control information enabling the decryption of the work keys regardless of the content of the partial viewing authorization information.

In this case, the decryption processor 31b decrypts the EMM using the master key, retrieves the work keys from the EMM, and
 10 supplies them to the ECM analyzer 32.

On the other hand, when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing, the decryption validity decision section 31a supplies the decryption processor 31b with
 15 the decryption control information alternately enabling and disabling the decryption of the work keys.

In this case, the decryption processor 31b decrypts the EMM intermittently, retrieves some of the work keys included in the EMM, and supplies them to the ECM analyzer 32.

20 When both the subscriber contract information and partial viewing authorization information inhibit viewing, the decryption validity decision section 31a supplies the decryption processor 31b with the decryption control information disabling the decryption of the work keys.

- 25 In this case, the decryption processor 31b does not retrieve any work keys from the EMM.

Thus, during intervals in which the work keys are not retrieved, the coded media data cannot be properly descrambled because the scrambling keys are not correctly retrieved from the
 30 ECM. Accordingly, the television receiver 35 displays only

partially correct pictures as in the foregoing embodiment 1.

EMBODIMENT 9

Fig. 9 is a block diagram showing an internal configuration of the EMM analyzer 31 in an embodiment of the conditional access system in accordance with the present invention, in which the same reference numerals designate the same or like portions to those of Fig. 8, and the description thereof is omitted here.

In Fig. 9, the reference numeral 31c designates a decryption processor for retrieving the subscriber contract information and partial viewing authorization information from the EMM output from the demultiplexer 29, for decrypting the EMM using the master key, and for retrieving the work keys from the EMM; 31d designates a work key output validity decision section for generating output control information for controlling the output of the work keys in response to the subscriber contract information and partial viewing authorization information; and 31e designates a work key output controller for supplying the ECM analyzer 32 with the work keys retrieved by the decryption processor 31c only when the output control information enables the output of the work keys.

Although the decryption processing of the EMM is controlled in response to the subscriber contract information and partial viewing authorization information in the foregoing embodiment 8, this is not essential. For example, the output processing of the work keys rather than the decryption processing of the EMM can be controlled in response to the subscriber contract information and partial viewing authorization information, achieving an advantage similar to that of the foregoing embodiment 8.

More specifically, when the decryption processor 31c retrieves from the EMM the subscriber contract information and partial viewing authorization information, it supplies them to the work key output validity decision section 31d, and when the
5 decryption processor 31c retrieves the work keys from the EMM using the master key, it supplies the work keys to the work key output controller 31e.

When the subscriber contract information authorizes viewing, the work key output validity decision section 31d
10 supplies the work key output controller 31e with the output control information enabling the output of the work keys regardless of the content of the partial viewing authorization information.

In this case, the work key output controller 31e supplies
15 the ECM analyzer 32 with all the work keys output from the decryption processor 31c.

On the other hand, when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing, the work key output
20 validity decision section 31d supplies the work key output controller 31e with the output control information alternately enabling and disabling the output of the work keys.

In this case, the work key output controller 31e supplies the ECM analyzer 32 with part of the work keys output from the
- 25 decryption processor 31c.

When both the subscriber contract information and partial viewing authorization information inhibit viewing, the work key output validity decision section 31d supplies the work key output controller 31e with the output control information disabling the
30 output of the work key.

In this case, the work key output controller 31e does not supply the ECM analyzer 32 with any of the work keys output from the decryption processor 31c.

5 EMBODIMENT 10

Although the partial viewing authorization information is inserted into the EMM to be transmitted in the foregoing embodiments 1-7, this is not essential. For example, the partial viewing authorization information can be inserted into the ECM
10 to be transmitted.

In this case, the ECM analyzer 32 rather than the EMM analyzer 31 retrieves the partial viewing authorization information from the ECM, making it possible to achieve the view control as in the foregoing embodiments 1-7.

15 The view control can be carried out on a program by program basis for all the receivers simultaneously or for each group of receivers.

EMBODIMENT 11

20 Although the partial viewing authorization information transmitted from the transmitting side controls the receiving side EMM analyzer 31, ECM analyzer 32 and descrambling processor 33 or media decoding section 34 in the foregoing embodiments 1-10, the partial viewing authorization information can further
- 25 include a control parameter indicating a partial view authorized range.

This makes it possible for the transmitting side to control various receiving side operations such as the frequency of decrypting the work keys, that of decrypting the scrambling keys,
30 that of decrypting the coded media data, the degree of changing

the order of the blocks of the coded media data or the frequency of decoding the coded media data. As a result, transmitting side can control the information amount obtainable from the pictures displayed on the television receiver 35.

5

EMBODIMENT 12

Although the receiving side displays pictures partially in response to the partial viewing authorization information transmitted from the foregoing embodiments 1-11, this is not essential. For example, the receiving side can display pictures only during a specific time period by using specific time period viewing authorization information (information authorizing viewing for a specific time period) as the partial viewing authorization information as shown in Fig. 11.

15 More specifically, the transmitting side inserts into the EMM the specific time period viewing authorization information that authorizes viewing only for a specific time period as the partial viewing authorization information and encrypts it. Receiving it, the receiving side retrieves from the EMM the
20 specific time period viewing authorization information, and carries out for only the specific time period the retrieval of the scrambling keys and work keys, and the decryption and decoding of the coded media data.

This makes it possible for a noncontract users to view the
- 25 program normally for only the specific time period.

Since the EMM is transmitted for each receiver, inserting the specific time period viewing authorization information into the EMM makes it easier for each receiver to manage the viewing validity control in the specific time period. On the other hand,
30 inserting the specific time period viewing authorization

information into the ECM makes it easy for all the receivers or for each group of the receivers to manage the authorization information.

Furthermore, since the EMM and ECM are multiplexed into a video signal or voice signal to be transmitted simultaneously, the receiving side can receive the specific time period viewing authorization information without providing any new storage for temporarily holding the specific time period viewing authorization information. This makes it possible to limit the scale of additional devices to a minimum for implementing the viewing validity control in the specific time period.

EMBODIMENT 13

Although the subscriber contract information and the partial viewing authorization information are separately transmitted in the foregoing embodiments 1-11, this is not essential. For example, it is possible not to transmit the partial viewing authorization information separately from the subscriber contract information, but to transmit subscriber contract information authorizing partial viewing.

More specifically, when the transmitting side sends the EMM to noncontract receivers, the system controller 21 inserts into the subscriber contract information not only parameters authorizing or inhibiting viewing, but also parameters authorizing viewing for a specific time period or parameters for authorizing periodic viewing at the time when the system controller 21 supplies the subscriber contract information to the EMM generator 25.

This causes the subscriber contract information to bear on the information corresponding to the partial viewing

authorization information, and hence makes it possible for the receiving side to carry out the view control as in the foregoing embodiments 1-11 by retrieving the subscriber contract information from the EMM.

5

EMBODIMENT 14

Although the receiving side partially displays pictures by receiving the partial viewing authorization information in the foregoing embodiments 1-11, the transmitting side can send the work keys by inserting them into the EMM only for a specific time period.

More specifically, by transmitting the EMM including the work keys only for the time period authorizing the receiving side to display pictures, the receiving side can correctly display pictures only for the time period it can retrieve the work keys from the EMM. In particular, this makes it possible for the receiving side to implement the viewing control as in the foregoing embodiments 1-11 without controlling the EMM analyzer 31, ECM analyzer 32, descrambling processor 33 or media decoding section 34.

EMBODIMENT 15

Although the embodiments 1-14 do not refer to the specifications of the multiplexer 27, demultiplexer 29 and media decoding section 34, they can be based on the MPEG-2 standard.

This makes it possible to construct a conditional access system based on the MPEG-2 standard.

EMBODIMENT 16

Although the number of programs to be transmitted from the

transmitting side is not referred to in the foregoing embodiments 1-15, a plurality of programs can be multiplexed into the packet stream transmitted from the transmitting side. In this case, the partial viewing authorization or inhibition can be

5 implemented for individual programs independently. This makes it possible for each program to carry out its own viewing control.

What is claimed is:

1. A conditional access system comprising:

a demultiplexer for demultiplexing a packet stream transmitted from a transmitting site into encrypted coded media data, an ECM (Entitlement Control Message) and an EMM (Entitlement Management Message);

an EMM decryption section for retrieving work keys and subscriber contract information from the EMM extracted by said demultiplexer;

means for retrieving partial viewing authorization information included in one of the EMM and ECM extracted by said multiplexer;

an ECM decryption section for decrypting the ECM using the work keys, and for retrieving scrambling keys from the ECM; and

outputting means for descrambling and decoding part of the coded media data using the scrambling keys when the partial viewing authorization information permits partial viewing, and for outputting the partially decoded coded media data.

2. The conditional access system according to claim 1, wherein said ECM decryption section comprises:

means for intermittently retrieving the scrambling keys from the ECM when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing, and wherein said outputting means comprises:

a media data descrambling section for descrambling the coded media data using the scrambling keys retrieved by said ECM decryption section; and

a decoding section for decoding the coded media data

descrambled by said media data descrambling section.

3. The conditional access system according to claim 2, wherein said means for intermittently retrieving the scrambling keys comprises:

a decryption validity decision section for outputting decryption control information in response to the subscriber contract information and the partial viewing authorization information; and

a decryption processor for intermittently retrieving the scrambling keys from the ECM in response to the decryption control information when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing.

4. The conditional access system according to claim 2, wherein said means for intermittently retrieving the scrambling keys comprises:

a decryption processor for retrieving all scrambling keys included in the ECM;

a scrambling key output validity decision section for outputting output control information in response to the subscriber contract information and the partial viewing authorization information; and

an output controller for supplying said media data descrambling section with only part of the scrambling keys in response to the output control information when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing.

5. The conditional access system according to claim 1, wherein said outputting means comprises:

a media data descrambling section for intermittently descrambling the coded media data using the scrambling keys when
5 the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing; and

a decoding section for decoding the coded media data descrambled by said media data descrambling section.

10

6. The conditional access system according to claim 5, wherein said media data descrambling section comprises:

a descramble validity decision section for outputting descramble control information alternately authorizing and
15 inhibiting descrambling when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing;

a descrambler for descrambling part of the coded media data in response to the descramble control information; and

20 a scramble control information modifier for handling part of the coded media data which is not descrambled as unencrypted data.

7. The conditional access system according to claim 1, wherein
- 25 said outputting means comprises:

a media data descrambling section for descrambling the coded media data using the scrambling keys retrieved by said ECM decryption section; and

a decoding section for intermittently decoding the coded
30 media data descrambled by said media data descrambling section,

when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing.

- 5 8. The conditional access system according to claim 7, wherein said decoding section comprises:

a decoding validity decision section for outputting decoding control information in response the subscriber contract information and the partial viewing authorization information;

10 and

a decoding processor for decoding only part of frames in a frame sequence constituting the coded media data in response to the decoding control information when the subscriber contract information inhibits viewing and the partial viewing

15 authorization information permits partial viewing.

9. The conditional access system according to claim 8, wherein said decoding processor decodes only I frames in response to the decoding control information when the subscriber contract

20 information inhibits viewing and the partial viewing authorization information permits partial viewing.

10. The conditional access system according to claim 7, wherein said decoding section comprises:

- 25 a decoding processor for decoding all the coded media data descrambled by said media data descrambling section; and

a media display controller for supplying only part of the descrambled coded media data to a television receiver when the subscriber contract information inhibits viewing and the partial

30 viewing authorization information permits partial viewing.

11. The conditional access system according to claim 1, wherein said outputting means comprises:

5 a media data descrambling section for descrambling the coded media data using the scrambling keys retrieved by said ECM decryption section; and

10 a decoding section for decoding the coded media data descrambled by said media data descrambling section, for storing the decoded coded media data into a memory on a block by block basis, and for outputting the blocks with changing their sequence when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing.

15 12. The conditional access system according to claim 1, wherein said EMM decryption section comprises means for intermittently retrieving work keys from the EMM when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing, wherein said
20 ECM decryption section decrypts the ECM using the work keys and retrieves scrambling keys from the ECM, and wherein said outputting means comprises:

- 25 a media data descrambling section for descrambling the coded media data using the scrambling keys retrieved by said ECM decryption section; and

a decoding section for decoding the coded media data descrambled by said media data descrambling section.

13. The conditional access system according to claim 12, wherein
30 said means for intermittently retrieving work keys comprises:

a decryption validity decision section for outputting decryption control information in response to the subscriber contract information and the partial viewing authorization information; and

- 5 a decryption processor for retrieving only part of the work keys from the EMM in response to the decryption control information when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing.

10

14. The conditional access system according to claim 12, wherein said means for intermittently retrieving work keys comprises:

a decryption processor for retrieving all the work keys included in the EMM;

- 15 a work key output validity decision section for outputting output control information about the work keys in response to the subscriber contract information and the partial viewing authorization information; and

- 20 a work key output controller for supplying only part of the work keys to said ECM decryption section in response to the output control information when the subscriber contract information inhibits viewing and the partial viewing authorization information permits partial viewing.

- 25 15. The conditional access system according to claim 1, wherein the partial viewing authorization information includes a control parameter indicating a partially authorized viewable range.

- 30 16. The conditional access system according to claim 1, wherein the partial viewing authorization information consists of

information authorizing viewing only for a specific time period.

17. The conditional access system according to claim 1, wherein the subscriber contract information that includes information
5 authorizing partial viewing is used as the partial viewing authorization information.

18. The conditional access system according to claim 1, wherein the EMM is used into which the work keys are inserted only for
10 specific time periods.

19. The conditional access system according to claim 1, wherein said demultiplexer and said decoding section are based on the MPEG-2 standard.

15

20. The conditional access system according to claim 1, wherein when a plurality of programs are multiplexed into the packet stream transmitted from the transmitting site, authorization, partial authorization and inhibition of viewing the programs are
20 determined for individual programs independently.

Abstract of the Disclosure

A conditional access system includes an EMM (Entitlement Management Message) analyzer for retrieving partial viewing authorization information. When the partial viewing
5 authorization information permits partial viewing, ECM (Entitlement Control Message) is decrypted using work keys, and scrambling keys are intermittently retrieved from the ECM. This can solve a problem of a conventional conditional access system in that an unauthorized user's receiver cannot display pictures
10 at all because the receiver cannot retrieve scrambling keys, and hence the user cannot enjoy a program even to such a degree as to perceive its feeling as in analog broadcasting systems, and thus the user cannot decide as to whether to make contract or not with viewing the program to some extent, which prevents the
15 provider of the program from offering effective invitation to the user.

FIG. 1

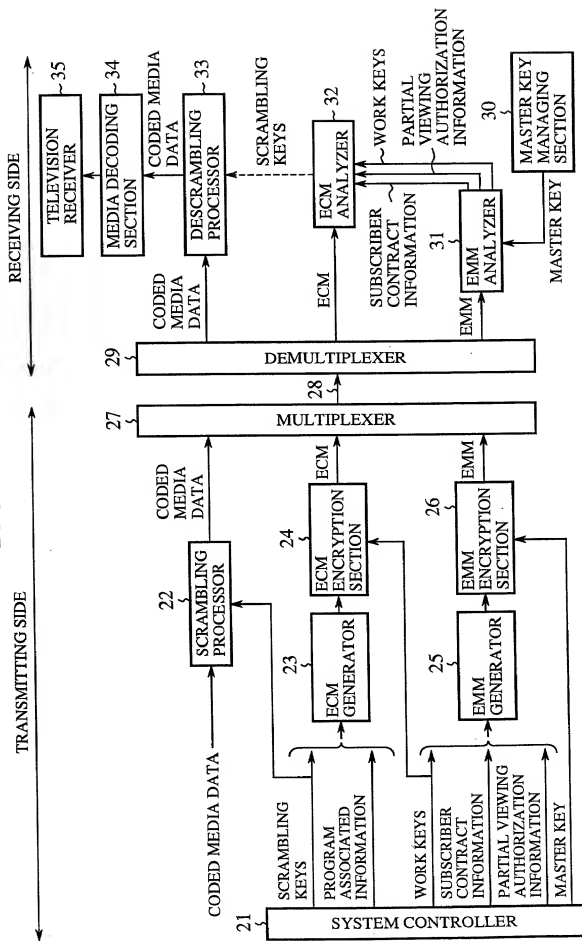


FIG. 2

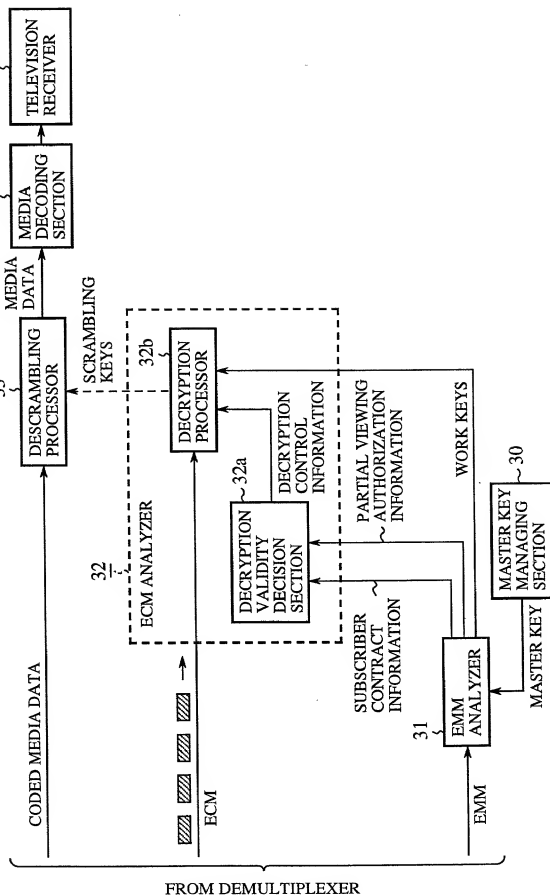


FIG. 3

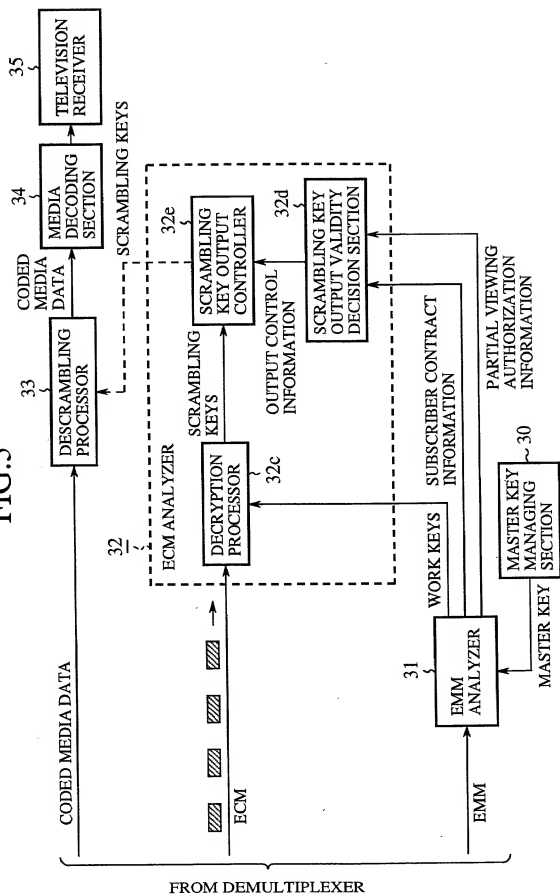


FIG. 5

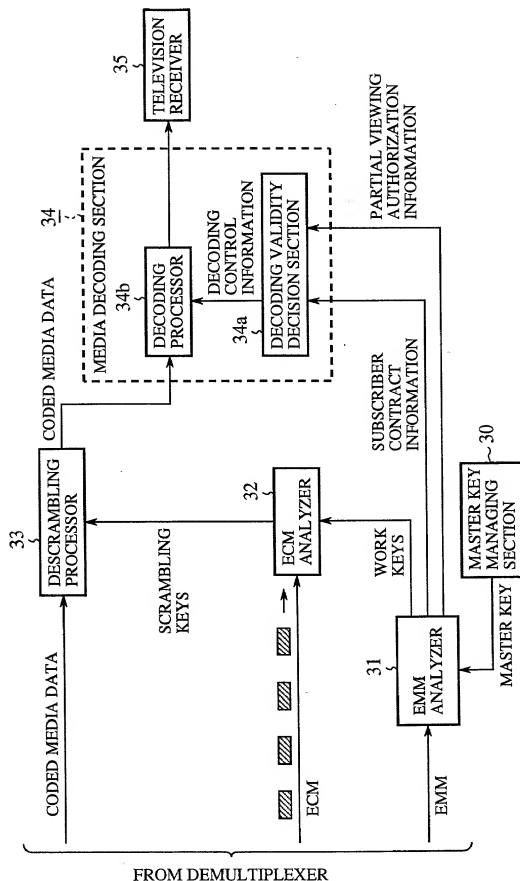


FIG. 6

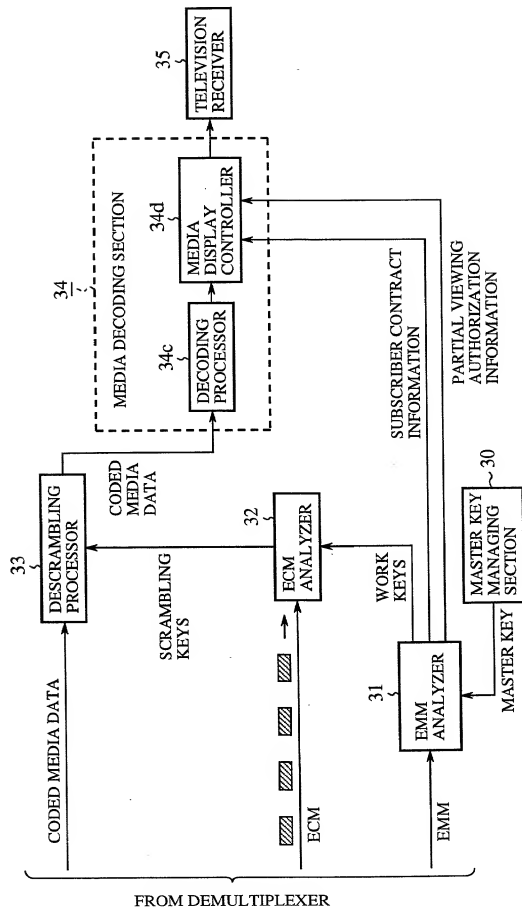


FIG. 7

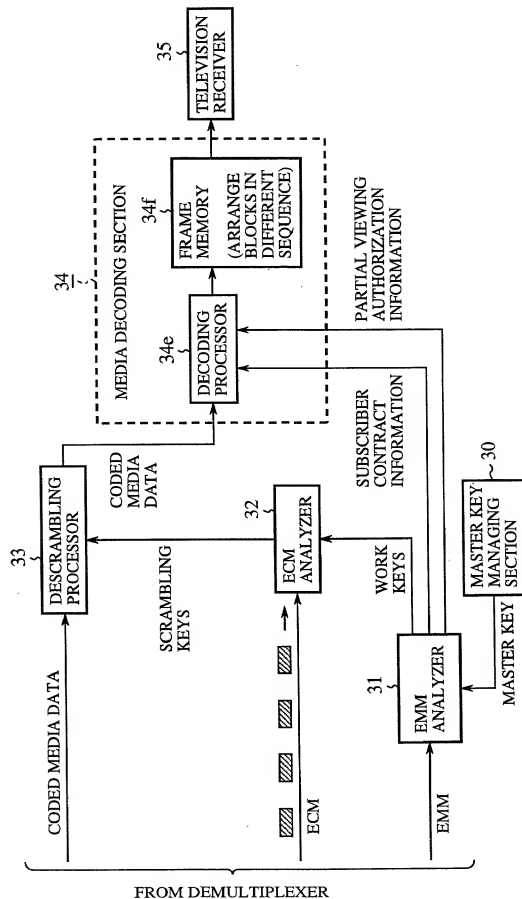


FIG. 8

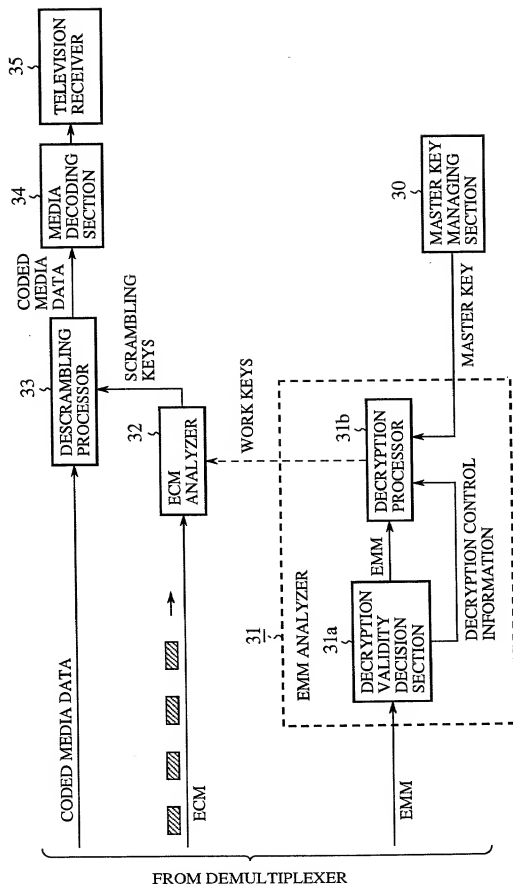


FIG. 9

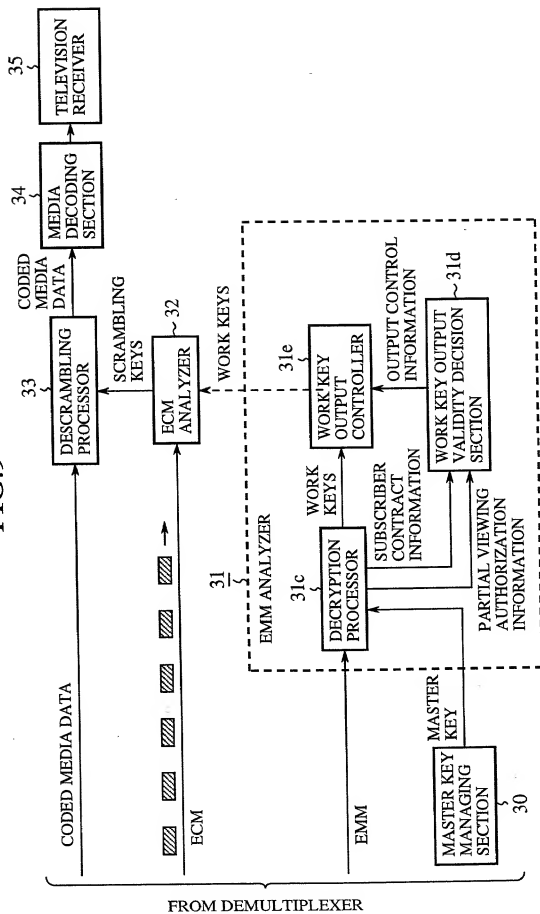


FIG. 10

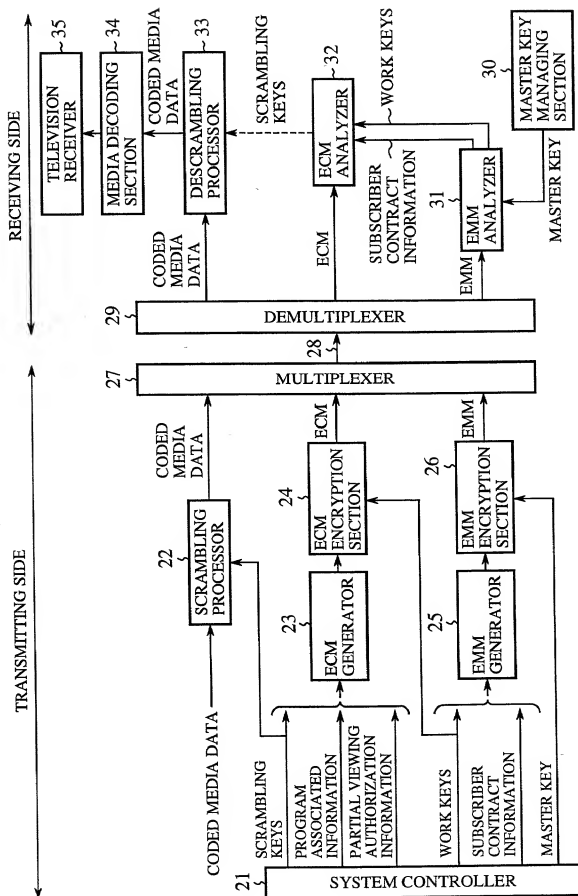


FIG. 11


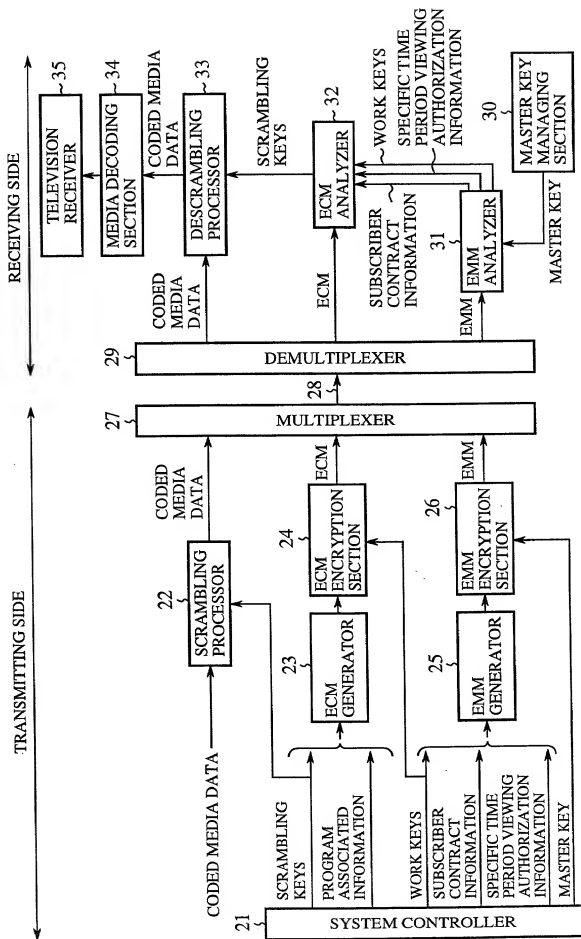


FIG.12 (PRIOR ART)

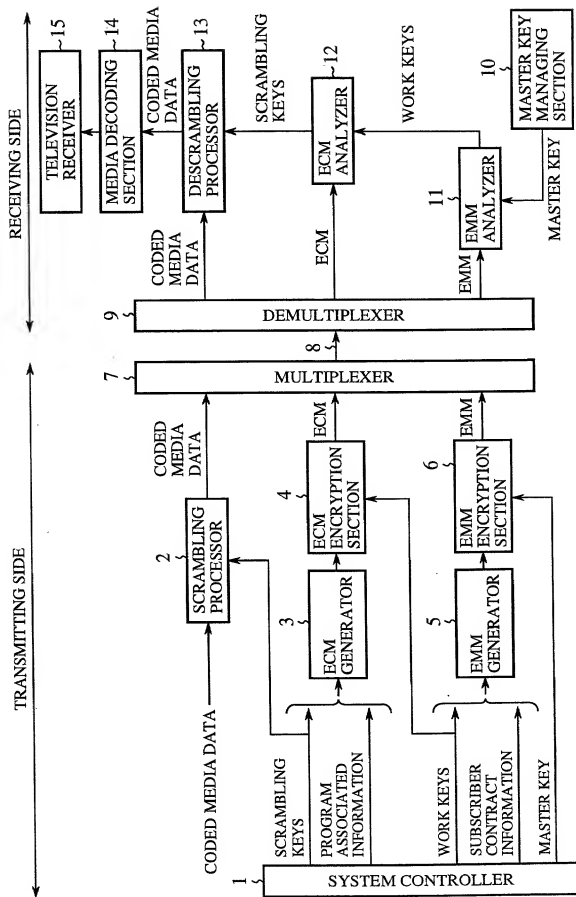

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

" CONDITIONAL ACCESS SYSTEM ENABLING

PARTIAL VIEWING"

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
 （該当する場合） _____ に訂正されました。

☐ was filed on _____
 as United States Application Number or
 PCT International Application Number
 _____ and was amended on
 _____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第 35 編 119 条 (a)-(d) 項又は 365 条 (b) 項に基づき下記の、米 国以外の国の少なくとも一カ国を指定している特許協力条約 365 (a) 項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s):

外国での先行出願

| | |
|-----------|-----------|
| 11-363297 | Japan |
| (Number) | (Country) |
| (番号) | (国名) |
| _____ | _____ |
| (Number) | (Country) |
| (番号) | (国名) |

私は、第 35 編米国法典 119 条 (e) 項に基づいて下記の米 国特許出願規定に記載された権利をここに主張いたします。

| | |
|-------------------|---------------|
| _____ | _____ |
| (Application No.) | (Filing Date) |
| (出願番号) | (出願日) |

私は、下記の米国法典第 35 編 120 条に基づいて下記の米 国特許出願に記載された権利、又は米 国を指定している特許協力条約 365 条 (c) に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第 35 編 112 条第 1 項又は特許協力条約で規定された方法で先行する米 国特許出願に開示されていない限り、その先行米 国出願書提出日以後で本出願書の日本国内または特許協力条約国際提出日までで期間中に入手された、連邦規則法典第 37 編 1 条 56 項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

| | |
|-------------------|---------------|
| _____ | _____ |
| (Application No.) | (Filing Date) |
| (出願番号) | (出願日) |
| _____ | _____ |
| (Application No.) | (Filing Date) |
| (出願番号) | (出願日) |

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第 18 編第 1001 条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

| | |
|------------------------|--------------------------|
| 21/December/1999 | <input type="checkbox"/> |
| (Day/Month/Year Filed) | |
| (出願年月日) | |
| _____ | <input type="checkbox"/> |
| (Day/Month/Year Filed) | |
| (出願年月日) | |

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

| | |
|-------------------|---------------|
| _____ | _____ |
| (Application No.) | (Filing Date) |
| (出願番号) | (出願日) |

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.88 which became available between the filing date of the prior application and the national or PCT International filing date of application.

| | |
|--|-------|
| _____ | _____ |
| (Status: Patented, Pending, Abandoned) | |
| (現況: 特許許可済、係属中、放棄済) | |
| _____ | _____ |
| (Status: Patented, Pending, Abandoned) | |
| (現況: 特許許可済、係属中、放棄済) | |

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration

(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

TERRELL C. BIRCH (Reg. No. 19,382)
 RAYMOND C. STEWART (Reg. No. 21,069)
 JOSEPH A. KOLASCH (Reg. No. 22,463)
 ANTHONY L. BIRCH (Reg. No. 26,122)

JAMES M. SLATTERY (Reg. No. 28,380)
 BERNARD L. SWEENEY (Reg. No. 24,448)
 MICHAEL K. MUTTER (Reg. No. 29,680)
 CHARLES GORENSTEIN (Reg. No. 29,271)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (first name and registration number)

GERALD M. MURPHY (Reg. No. 26,977)
 LEONARD R. SVENSSON (Reg. No. 30,330)
 TERRY L. CLARK (Reg. No. 32,644)
 ANDREW D. MEKLE (Reg. No. 32,868)

MARC S. WEINER (Reg. No. 32,181)
 ANDREW F. REISH (Reg. No. 33,443)
 JOE M. MUNCY (Reg. No. 32,334)
 C. JOSEPH FARACI (Reg. No. 32,350)

書類送付先

Send Correspondence to:

BIRCH, STEWART, KOLASCH & BIRCH, LLP
 P.O. BOX 747
 FALLS CHURCH, VA 22040-0747
 TEL: (703) 205-8000

直接電話連絡先: (名前及び電話番号)




Direct Telephone Calls to: (name and telephone number)

BIRCH, STEWART, KOLASCH & BIRCH, LLP
 TEL: (703) 205-8000

| | | |
|-------------|---|-----------------------|
| 唯一または第一発明者名 | Full name of sole or first inventor Daisuke TSUKAHARA | |
| 発明者の署名 | Inventor's signature <i>Daisuke Tsukahara</i> | Date July 28, 2000 |
| 住所 | Residence Tokyo, Japan | |
| 国籍 | Citizenship Japanese | |
| 私書箱 | Post Office Address c/o MITSUBISHI DENKI KABUSHIKI KAISHA, 2-3, Marunouchi 2-chome, Chiyoda-ku, Tokyo 100-8310 Japan | |
| 第二共同発明者 | Full name of second joint inventor, if any Yasutaka AKITA | |
| 第二共同発明者 | Second inventor's signature <i>Yasutaka Akita</i> | Date July 28, 2000 |
| 住所 | Residence Tokyo, Japan | |
| 国籍 | Citizenship Japanese | |
| 私書箱 | Post Office Address c/o MITSUBISHI DENKI KABUSHIKI KAISHA, 2-3, Marunouchi 2-chome, Chiyoda-ku, Tokyo 100-8310 Japan | |

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)

| | | | |
|----------------------|---|--|-----------------------|
| 第3の共同発明者の氏名 (該当する場合) | | Full name of third joint inventor, if any, Susumu OKA | |
| 同第3発明者の署名 | 日付 | Third Inventor's signature  | Date July 28, 2000 |
| 住所 | Residence Tokyo, Japan | | |
| 国籍 | Citizenship Japanese | | |
| 郵便の宛先 | Post Office Address c/o MITSUBISHI DENKI KABUSHIKI KAISHA, 2-3, Marunouchi 2-chome, Chiyoda-ku, Tokyo 100-8310 Japan | | |
| 第4の共同発明者の氏名 (該当する場合) | | Full name of fourth joint inventor, if any, Tokumichi MURAKAMI | |
| 同第4発明者の署名 | 日付 | Fourth Inventor's signature  | Date July 28, 2000 |
| 住所 | Residence Tokyo, Japan | | |
| 国籍 | Citizenship Japanese | | |
| 郵便の宛先 | Post Office Address c/o MITSUBISHI DENKI KABUSHIKI KAISHA, 2-3, Marunouchi 2-chome, Chiyoda-ku, Tokyo 100-8310 Japan | | |
| 第5の共同発明者の氏名 (該当する場合) | | Full name of fifth joint inventor, if any, Yukinari MATSUDA | |
| 同第5発明者の署名 | 日付 | Fifth Inventor's signature  | Date July 28, 2000 |
| 住所 | Residence Tokyo, Japan | | |
| 国籍 | Citizenship Japanese | | |
| 郵便の宛先 | Post Office Address c/o MITSUBISHI DENKI KABUSHIKI KAISHA, 2-3, Marunouchi 2-chome, Chiyoda-ku, Tokyo 100-8310 Japan | | |